


M1078 2.5 Ton Truck, Cargo 4x4



M1079 2.5 Ton Truck, Van 4x4

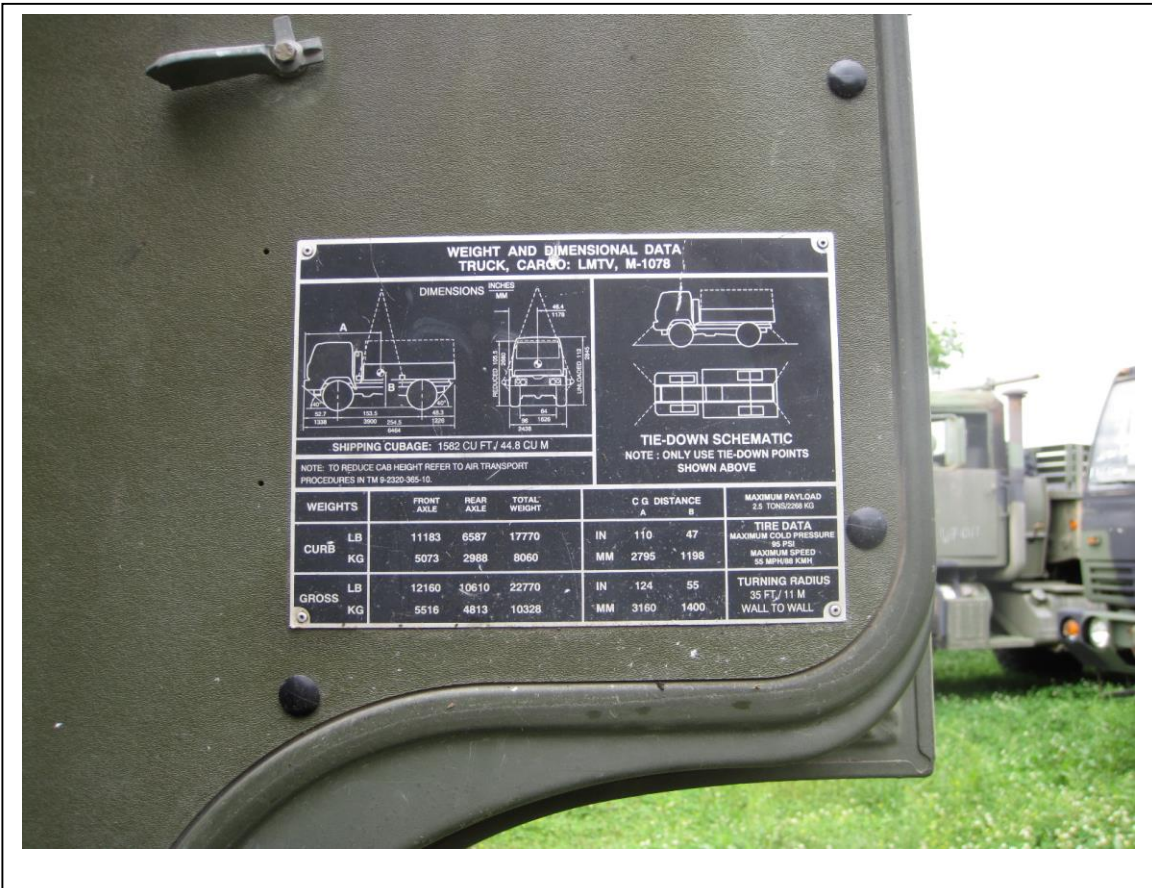

WEIGHT AND DIMENSIONAL DATA
TRUCK, VAN: LMTV, M-1079

DIMENSIONS

TIE-DOWN SCHEMATIC
 NOTE : ONLY USE TIE-DOWN POINTS SHOWN ABOVE

SHIPPING CUBAGE: 1988 CU FT / 56.3 CU M

NOTE: TO REDUCE CAB HEIGHT REFER TO AIR TRANSPORT PROCEDURES IN TM 9-2320-385-10. REMOVE VAN BODY FOR AIR TRANSPORT.

WEIGHTS		FRONT AXLE	REAR AXLE	TOTAL WEIGHT	C G DISTANCE		MAXIMUM PAYLOAD 2.5 TONS/2268 KG
					A	B	
CURB	LB	11588	7415	19004	IN 113	49	TIRE DATA MAXIMUM COLD PRESSURE 95 PSI MAXIMUM SPEED 55 MPH/88 KMH
	KG	5256	3364	8620	MM 2860	1241	
GROSS	LB	12508	11496	24004	IN 126	56	TURNING RADIUS 35 FT / 11 M WALL TO WALL
	KG	5673	5219	10888	MM 3206	1430	

M1083 5 Ton Truck, Cargo 6x6



**WEIGHT AND DIMENSIONAL DATA
TRUCK, CARGO: MTV, W/WN, M-1083**

DIMENSIONS

TIE-DOWN SCHEMATIC
NOTE: ONLY USE TIE-DOWN POINTS SHOWN ABOVE

SHIPPING CUBAGE: 1730 CU FT / 49.0 CU M

NOTE: TO REDUCE CAB HEIGHT REFER TO AIR TRANSPORT PROCEDURES IN TM 9-2320-366-10.

WEIGHTS		FRONT AXLE	INTERMEDIATE AXLE	REAR AXLE	TOTAL WEIGHT	C G DISTANCE		MAXIMUM PAYLOAD 5_TONS/4536 KG
		A	B	A		B		
CURB	LB	11592	5140	5140	21873	IN	129	TIRE DATA MAXIMUM COLD PRESSURE 95 PSI MAXIMUM SPEED 55 MPH/88 KMH
	KG	5258	2332	2332	9922	MM	3271	
GROSS	LB	13485	9194	9194	31873	IN	146	TURNING RADIUS 40 FT / 12 M WALL TO WALL
	KG	6117	4170	4170	14458	MM	3706	

M923A2 5 Ton Truck, Cargo 6x6



WEIGHT & DIMENSION DATA				TRUCK, CARGO: 5 TON 6X6 M923A2 WO/W		
				WEIGHT	EMPTY	LOADED
				PAY LOAD		10,000
				FRONT AXLE	9,450	9,390
				INTER AXLE	6,050	11,080
				REAR AXLE	6,050	11,080
				TOTAL LBS	21,550	31,550
				MAX TOWED LOAD		15,000
				ALL WEIGHTS LESS CREW		
				NATL STOCK NO. 2320-01-230-0507		
				IDENTIFICATION NO. 2301291		
				MFD BY BMY - DIV. OF HARSCO		
				CONTRACT NO. DAAE07-86-C-J111		
				DATE OF DELIVERY		
				US PROPERTY		
SHIPPING CUBAGE 1644 CU. FT.						
SERVICING DATA			ELECTRICAL SYSTEM 24 V			
DIESEL FUEL PER FEDERAL SPEC VV-F-800			TIRE INFLATION PRESSURE (PSI)			
FUEL TANK	CAPACITY	81 GAL	HIGHWAY	FRT AND REAR	55	
COOLING SYSTEM	CAPACITY	47 QTS	OFF HIGHWAY	FRT AND REAR	35	
CRANK CASE	CAPACITY	27 QTS	MUD SAND AND SNOW	FRT AND REAR	20	
TRANSMISSION	CAPACITY	17 QTS				
TEMPERATURE		ENGINE OIL	GEAR OIL	TRANSMISSION		
ABOVE 155° F		MIL-L-2104 GR 30	MIL-L-2105 GR 80/90	MIL-L-2104 GR 10		
40° TO 155° F		MIL-L-2104 GR 10	MIL-L-2105 GR 80/90	MIL-L-2104 GR 10		
40° TO 85° F		MIL-L-46157	MIL-L-2105 GO 75	MIL-L-46157 OEA		
PUBLICATIONS APPLYING TO THIS VEHICLE						
OPER. MANUAL 9-2320-272-10						
LUBE ORDER 9-2320-272-12						
MAINT. MANUAL 9-2320-272-20						
PARTS MANUAL 9-2320-272-20P						
CHANGE OIL & FILTERS EVERY 3000 MILES OR 6 MONTHS						